

Developer Installation

1. Installing conditions

A. Copier installation

Do not install your copier in areas that are:

- damp, humid, or very dusty
- exposed to direct sunlight
- poorly ventilated
- subject to extreme temperature or humidity changes, e.g., near an air conditioner or heater.
- Be sure to allow the required space around the machine for servicing and proper ventilation.

B. Power source

•Use an exclusive-use power outlet. If the power plug of this machine is inserted into a power outlet commonly used with other illumination units, flickers of the lamp may be result. Use a power outlet which is not used commonly with any illumination units.

•Avoid complex wiring.

C. Grounding wire connection.

•To avoid danger, be sure to connect a grounding wire. If no grounding wire is connected and a leakage occurs, a fire or an electric shock may be result.

2. Removal of protective material and fixing screw


1) Remove all tapes and protective material.

•Remove all tapes, then open the document cover and remove the protective material of sheet shape

2) Remove the fixing screw.

•Use a coin to remove the fixing screw.

•The fixing screw is required when transporting the machine. Keep it in the tray. (Refer to the later description.)




3. Installing procedure


A. Developer cartridge installation

1) Open the front cover.


•Pull on the top center of the front cover to open.




2) Loosen the screw and remove the developer cartridge.




3) Remove the developer tank from the developer cartridge.



4) Supply developer into the developer tank while rotating the MG roller in the arrow direction.

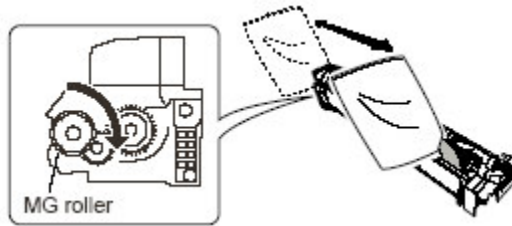

- Shake the developer bag enough before opening it.

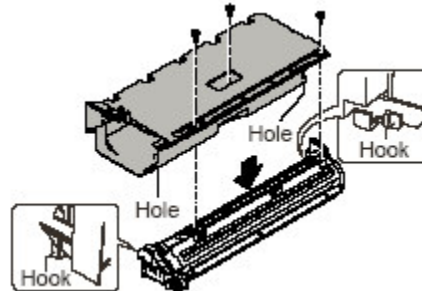

Note: Check that the DV seal is free from developing agent. If developing agent is attached to the DV seal, clean it carefully. Check to insure that the hook is engaged in two positions.


5) Attach the developer tank to the developer cartridge.

* After supplying developer into the developer cartridge, do not tilt or shake the developer cartridge.


6) Attach the developer cartridge to the copier, and fix it with the screw.

B. Toner cartridge installation


- 1) Shake the toner cartridge several times horizontally, and remove the tape.
* Do not hold the shutter lever when shaking.
* After removing the tape, do not tilt or shake the toner cartridge.




- 2) Attach the toner cartridge to the copier.



- 3) Pull the shutter lever.




- Close the front cover A, then close the side cover B.
- When closing the front cover, gently press the both sides.
 - When closing the side cover, hold the knob.
 - When closing the covers, be sure to close the front cover first, then close the side cover. If closed in a wrong sequence, the covers may be broken.




4. Removal and storage of fixing screw


- 1) Lift the knob and gently pull out the tray.



- 2) Hold the paper pressure plate and turn the fixing screw in the arrow direction.



- 3) Store the fixing pin and the fixing screw in the tray.
•Store the fixing screw which was removed in the above procedure 2 and the fixing screw which was removed in procedure 2 of 2.
•Removal of protective material and fixing screw in the storage place in the tray.

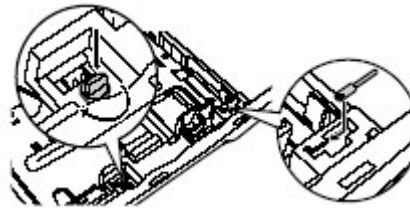

If you have any questions or problems please call us at 866-530-8502 or visit our website at www.businessneedz.com