

[5] UNPACKING AND INSTALLATION

1. Installing conditions

A. Copier installation

Do not install your copier in areas that are:

- damp, humid, or very dusty
- exposed to direct sunlight
- poorly ventilated
- subject to extreme temperature or humidity changes, e.g., near an air conditioner or heater.
- Be sure to allow the required space around the machine for servicing and proper ventilation.

B. Power source


- Use an exclusive-use power outlet. If the power plug of this machine is inserted into a power outlet commonly used with other illumination units, flickers of the lamp may be result. Use a power outlet which is not used commonly with any illumination units.
- Avoid complex wiring.

C. Grounding wire connection.

- To avoid danger, be sure to connect a grounding wire. If no grounding wire is connected and a leakage occurs, a fire or an electric shock may be result.

2. Removal of protective material and fixing screw

- 1) Remove all tapes and protective material.
 - Remove all tapes, then open the document cover and remove the protective material of sheet shape
- 2) Remove the fixing screw.
 - Use a coin to remove the fixing screw.
 - The fixing screw is required when transporting the machine. Keep it in the tray. (Refer to the later description.)

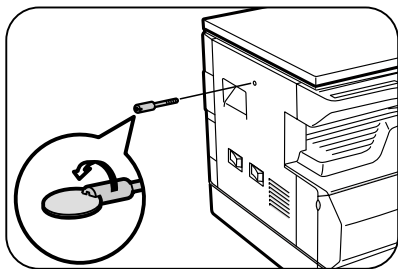


3. Installing procedure


A. Developer cartridge installation

- 1) Open the manual tray, and open the side cover.


- 2) Open the front cover.
 - Hold the both sides and pull down to open.

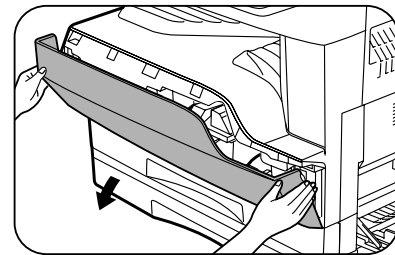


- 3) Loosen the screw and remove the developer cartridge.

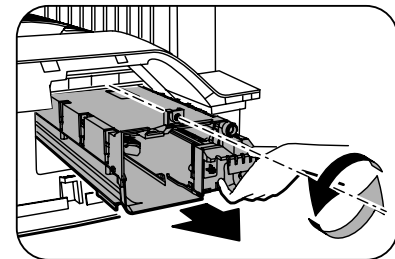


- 4) Remove the developer tank from the developer cartridge.

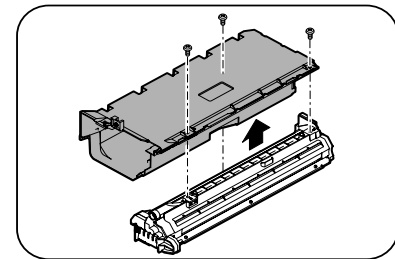

- 5) Supply developer into the developer tank while rotating the MG roller in the arrow direction.

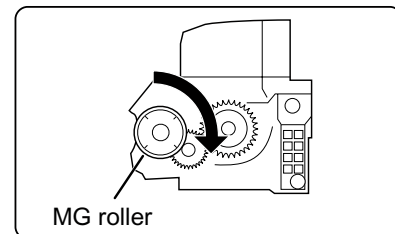

- * Shake the developer bag enough before opening it.

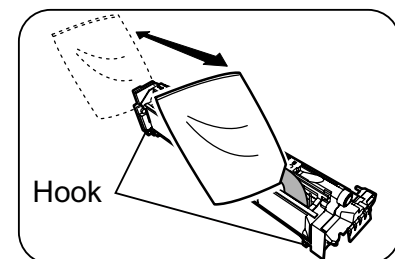

Note: Check that the DV seal is free from developing agent. If developing agent is attached to the DV seal, clean it carefully.
Check to insure that the hook is engaged in two positions.

- 6) Attach the developer tank to the developer cartridge.
 - * After supplying developer into the developer cartridge, do not tilt or shake the developer cartridge.
- 7) Attach the developer cartridge to the copier, and fix it with the screw.