


## Options

### Memory

**SD Card  
(Maximum 512MB)**



**Handset Kit UE-403171**



**Stand DA1D190**



**550-sheet  
2nd Paper  
Feed Module  
DA-DS188**

### Printer/Network Printer

**Expansion Board  
DA-EM600F**

**Printer Controller Module  
UE-404091**

**Internet Fax/Email/Network Scanner Options  
UE-404090**

**G3 Communication Port Kit (2nd G3 Fax)  
UE-407026**

### Consumables



**Toner cartridge  
UG-5530**

## UF-8000 Specifications

### General Functions

Type	Desktop
Power Requirement	AC 120V, 50/60 Hz
Power Consumption	Max: Approximately 1000 W Power saver mode: 12 Wh Sleep mode: 7 Wh
Dimensions (W x D x H)*1	17.7" x 16.5" x 17.6" (450 x 418 x 448 mm) (Excluding optional equipment)
Weight*1	Approx. 48.5 lb (Approx. 22 kg) (Excluding optional equipment)

### Fax Functions

Compatibility	ITU-T Group 3, ECM
Modem Speed	33.6 kbps - 2.4 kbps with automatic fallback
Coding Scheme	MH/MR/MMR/JBIG
Transmission Speed*2	Approximately 2.9 seconds / page (Letter)
Number of Memory Job Files	50
Document Size	<b>Max:</b> 8.5" x 78.7" (216 mm x 2000 mm <sup>3</sup> ) with operator's assistance <b>Min:</b> 5.5" x 5.5" (140 mm x 140 mm)
Effective Scanning Width	8.34" (212mm)
Automatic Document Feeder	100 pages (20 lb)
Scanning Speed*4	Approximately 0.7 seconds/page (Letter)
Scanning Resolution	<b>Standard:</b> 203 dots/inch x 98 lines/inch (8 dots/mm x 3.85 lines/mm) <b>Fine:</b> 203 dots/inch x 196 lines/inch (8 dots/mm x 7.7 lines/mm) <b>Super Fine:</b> 406 dots/inch x 391 lines/inch (16 dots/mm x 15.4 lines/mm) <b>600 dpi:</b> 600 dpi x 600 dpi
Recording Method	Monochrome laser printing on plain paper
Recording Paper Size	Letter/Legal
Effective Recording Width	8.15" (207mm)
Paper Feed	<b>Standard Tray:</b> 250 sheets paper tray unit x 1 + 1-sheet bypass Maximum 800 sheets with option
Image Memory Capacity*5	<b>Standard:</b> 12MB (720 pages) <b>Maximum:</b> 512MB (1,020 pages)
Number of Auto Dialers	Standard: 280 Max: 1,000 with optional SD Card (32MB)

### Printer Functions

Network Printer Interface	Ethernet 10Base-T/100Base-TX
Local Printer Interface	USB 1.1
Printing Speed*6	19 ppm
Paper Size	Letter/Legal/Invoice*7/Envelope (#9, #10)*7
Printing Resolution	1200 equivalent x 600 dpi
Printer Memory	32MB
Printer Language	<b>Standard:</b> Panasonic Printing System for Windows® <b>Option:</b> PCL 5e Emulation, PCL 6 Emulation
Compatible Operating System	Windows® XP/2000/Server 2003/98/Me, Windows NT® 4.0

### Network Scanner Functions

Network Scanner Interface	Ethernet 10Base-T/100Base-TX
Scanning Resolution	600 x 600 dpi
Scanning Speed*4	Approximately 0.7 seconds (8 dots x 3.85 lines/mm)
Data Format	TIFF, PDF

### Scan-to-Email / Internet Fax

Compatibility	IETF RFC 2305, ITU-T T.37
Communication Protocol	TCP/IP, SMTP, POP3, MIME, DHCP LDAP, SNMP/MB
Network Connectivity	Ethernet 10Base-T /100Base-TX (IEEE802.3)
Data Format*8	TIFF-FX (Profile S/F/J), PDF


### Notes

- \*1 Dimensions and weight are approximate.
- \*2 Transmission time applies to memory transmission of text data using only ITU-T Image No.1 between the same models at maximum modem speed. Transmission time may vary in actual usage. Usually public telephone lines can only support communication speeds of 28.8 Kbps or lower. Via PBX, transmission speed may fall back to a lower speed.
- \*3 Standard/Fine mode.
- \*4 Scanning speed applies to the feeding process from the top to the end of a single page test chart. The time for the feeding process does not include the time that it takes for the top edge of the page to reach the scanning point and page ejection. Time for entire storing process is not applied.
- \*5 Based on ITU-T Image No.1 scanned in Standard mode.
- \*6 Speeds are contingent upon applications, machine configuration, and status. Individual speeds may vary.
- \*7 Bypass only
- \*8 Internet Fax only supports TIFF-FX format.

Design and specification are subject to change without notice. Not all options may be available at the time of notification.

Microsoft® Windows® and Windows NT® are registered trademarks of Microsoft Corporation. Adobe, PostScript and PostScript3 are either registered trademarks or trademarks of Adobe Systems, Inc. PCL is either trademark or registered trademark of Hewlett-Packard Company and/or its subsidiaries. WORKIO® is a registered trademark of Matsushita Electric Industrial Co., Ltd. All other brand or product name are the property of their respective holders.

### Dimensions

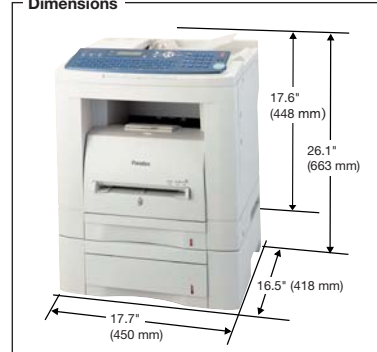

**PRELIMINARY SPECIFICATIONS**

# Panasonic®

Panasonic Digital Document Company  
Unit of Matsushita Electric Corporation of America  
Two Panasonic Way, Secaucus, NJ 07094  
For a local dealer, please call 1-800-742-8086  
<http://www.panasonic.com/office>



As an Energy Star® partner, Panasonic has determined that this product meets the Energy Star® guidelines for energy efficiency.

### ISO 9001 Quality Management System

Our business processes which produce document, information and network products, from manufacturing to marketing, conform to ISO9001 Quality Management Systems standard. Design, development, manufacture, installation, repair and maintenance of document, information and network products, their associated devices and consumables. In addition, the plants outside Japan have acquired ISO 9001 certification.



001